

The Ohio State University
Department of Electrical and Computer Engineering

ECE 551

Quiz #3

May 16, 2008

Given the transfer function

$$G(s) = \frac{-(s-10)}{s(s+10)}$$



Sketch the Bode magnitude (dB vs log ω in radians) and phase (degrees vs. log ω in radians) plots below. You must label each portion of the plot, clearly indicating the final result.

$$G(s) = \frac{10(1 - \frac{1}{10}s)}{10 \cdot s(1 + \frac{1}{10}s)} = \frac{1 - \frac{1}{10}s}{s(1 + \frac{1}{10}s)} \quad G(j\omega) = \frac{1 - j\frac{\omega}{10}}{j\omega(1 + j\frac{\omega}{10})}$$

1. For $G_1(j\omega) = 1 - j\frac{\omega}{10}$



$$20 \lg |G_1(j\omega)| = 20 \lg \sqrt{1 + (\frac{\omega}{10})^2}$$

$$\angle G_1(j\omega) = \tan^{-1}(-\frac{\omega}{10}) = -\tan^{-1} \frac{\omega}{10}$$

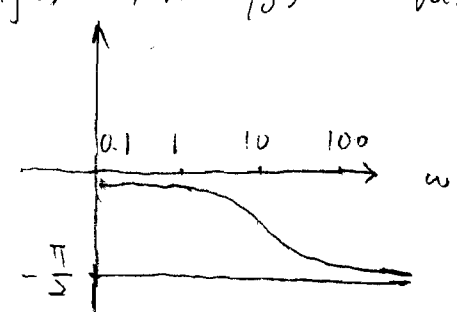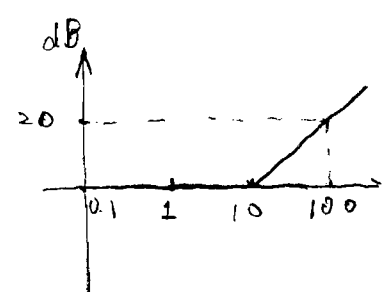

2. For $G_2(j\omega) = \frac{1}{1 + j\frac{\omega}{10}}$




$$20 \lg |G_2(j\omega)| = -20 \lg \sqrt{1 + (\frac{\omega}{10})^2} \quad \angle G_2(j\omega) = -\tan^{-1} \frac{\omega}{10}$$

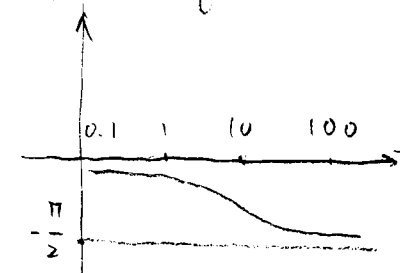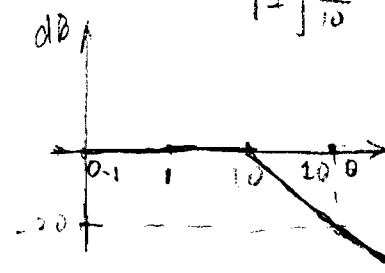

3. For $G_3(j\omega) = \frac{1}{j\omega}$

$$20 \lg |G_3(j\omega)| = -20 \lg \omega$$

$$\angle G_3 = -\frac{\pi}{2}$$

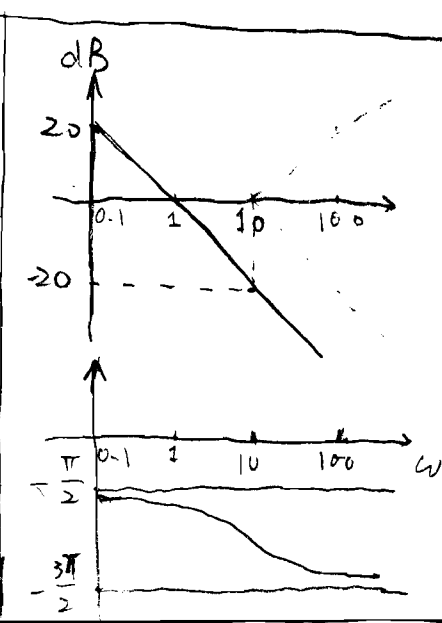

4. $G(j\omega) = \frac{1 - j\frac{\omega}{10}}{j\omega(1 + j\frac{\omega}{10})}$

total

Design Project #1. Solution.

P10.1 $\zeta = 0.6 \Rightarrow P.O. = e^{-\frac{\zeta}{\sqrt{1-\zeta^2}}} \times 100\% = 9.48\%$
 $t_s < 2.5 \Rightarrow \frac{4}{\zeta \omega_n} < 2.5, \zeta \omega_n > 1.6, \omega_n > 2.67$

Lead Compensator $G_c(s) = \frac{s+z_c}{s+p_c}, z_c < p_c$


Pick a zero z_c to drag root locus to LHP, pick a pole for from origin to make root locus move to real axis. Also pick a large k to ensure that $\omega_n > 2.67$ to meet overshoot specification.

Since this is a design problem, I can only give one candidate design.

I pick $k_1 = 1, z_c = 3, p_c = 300$
 $k_2 = 6300$

$G_c = 6300 \frac{s+3}{s+300}$

overshoot 9.47%, $t_s = 0.715$.

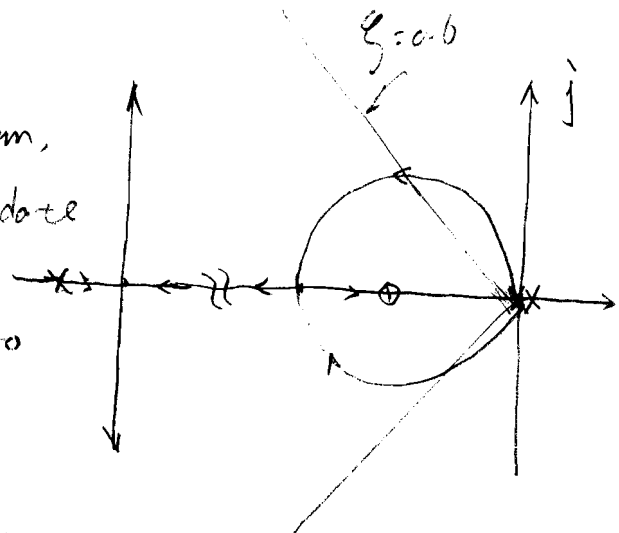

P10.3 $G(s) = \frac{16(s+1)}{s(s^2+2s+16)}$, P.O. < 5% $\Rightarrow \zeta_d > 0.69$
 $t_s < 5, \zeta \omega_n > 0.8, \omega_n > 1.15$

design strategy is same as 10.1.

Here we also use $G_c(s) = \frac{k(s+1)}{s+300}$

choose $k = 2000$.

P.O. = 2.35%, $t_s = 1.085$.

